

CALIBRATION PRESS

Enterprise Creating Future with Ceaseless Challenges and Innovations



Calibration Press

It is the equipment for correcting the roundness and straightness of the pipe by continuously feeding the bent and formed pipes after welding inside and outside.

성형 Bending된 Pipe를 내,외부 용접 후 연속적인 동작으로 Feeding하면서 Pipe의 진원도 및 직진도를 교정하기 위한 장비이다.


General Specification

Equipment	Description	Standard Specification
Calibration Press	External Pipe Dia	∅406 ~ ∅1,626mm(16" ~ 64")
	Material	API 5L GR B ~ X100
	Pipe Length	6,000 ~ 12,800mm/18,300mm
	Wall Thickness	8 ~ 70mm
	Pipe Weight	Max. 30ton
	Straightening Unit	Hydraulic. system
	Forming Pitch	500mm
	Production Rate	8 ~ 10 pcs/hr 30" x 25.4t x 12,800mm / 18,300mm

※We can cope with customer requirements. / 고객 요구사항에 대응할 수 있습니다.

SEOKWANG INDUSTRIAL Co., Ltd. is supplying with a turn-key base system for overall process starting from edge milling, pipe forming to final inspection.

Process in brief

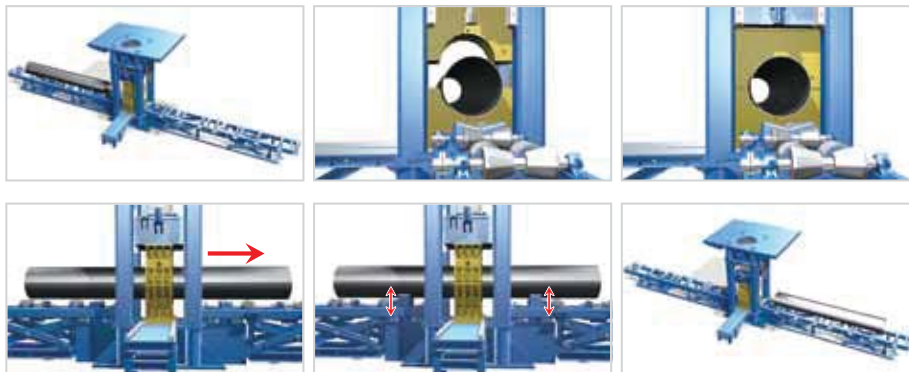





본사

경상남도 김해시 진영읍 하계로 240번길 93-26

T. 055-322-6544 F. 055-334-4727 / 324-4722

H/Q & Plant

93-26 St. 240 Hagye-ro, Jinyoung-eup, Gimhae-si, Gyung-sangnam-do, Korea

T. 82-55-322-6544 F. 82-55-334-4727

www.skmic.co.kr E-mail : sk6544@hanmail.net

Copyright © 2014. 07. SEOKWANG INDUSTRIAL Co., Ltd. All Rights Reserved / Designed by HRUM Corporation Co., Ltd.